



Semi Rigid Flexible Aluminum Duct - Class O, Flexible Air Duct

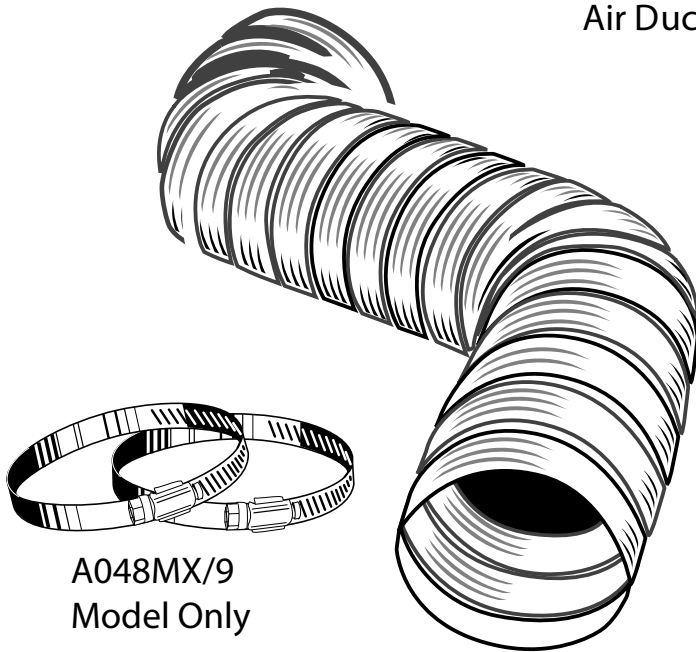

Model No.	Description
A038/9	Semi Rigid Flex. Alum. Duct
A038/16	Semi Rigid Flex. Alum. Duct
Ao38/25	Semi Rigid Flex. Alum. Duct
A0325/5	Semi Rigid Flex. Alum. Duct
A045/9	Semi Rigid Flex. Alum. Duct
A048/6	Semi Rigid Flex. Alum. Duct
A048X/6	Semi Rigid Flex. Alum. Duct
A048MX/9	Duct w/ 2 metal worm drive clamps
A048/9	Semi Rigid Flex. Alum. Duct
A048/16	Semi Rigid Flex. Alum. Duct
Ao48/40	Semi Rigid Flex. Alum. Duct
A0420/14	Semi Rigid Flex. Alum. Duct
A0425/3	Semi Rigid Flex. Alum. Duct
A058/5	Semi Rigid Flex. Alum. Duct
A068/4	Semi Rigid Flex. Alum. Duct
A078/5	Semi Rigid Flex. Alum. Duct
A088/4	Semi Rigid Flex. Alum. Duct

Semi Rigid Flexible Aluminum Duct

Model No.	A	length
A038/9	3" dia.	8 ft.(2.4m)
A038/16	3" dia.	8 ft.
A038/25	3" dia.	8 ft.
A0325/5	3" dia.	25 ft(7.6m).
A045/9	4" dia.	5 ft.(1.5m)
A048/6	4" dia.	8 ft.
A048X/6	4" dia.	8 ft.
A048MX/9	4" dia.	8 ft.
A048/9	4" dia.	8 ft.
A048/16	4" dia.	8 ft.
Ao48/40	4" dia.	8 ft.
A0420/14	4" dia.	20 ft.
A0425/3	4" dia.	25 ft.
A058/5	5" dia.	8 ft.
A068/4	6" dia.	8 ft.
A078/5	7" dia.	8 ft.
A088/4	8" dia.	8 ft.

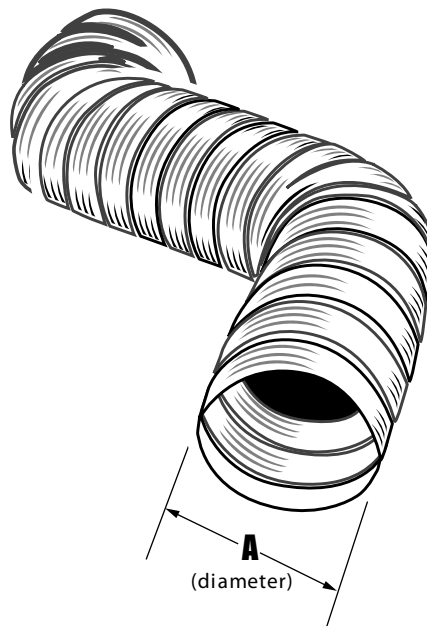

Performance Data

for uninsulated aluminum flexible duct

Maximum Velocity

- 5000 FPM / 25 m/sec

Maximum Rated Pressures

- 3" -10" dia., 6" W.C / 1.5 Kpa Pos/Neg

Operating Temperature Range

- -100°F to 430°F,-73 C to 221 C Inter.

Class O Air Duct, Flexible

Flame Spread/Smoke Developed

- 0/0

General Information

- 8 ft(2.4m) lengths compress to 28" (.71m)
- 25 ft(7.6m) lengths compress to 88" (2.2m)
- material description:
common name - aluminum alloy
trade name - aluminum alloy
- a multiple use product, our semi rigid flexible ducting can be used for exhaust venting bathroom vents, clothes dryers, range hoods ect. . .



metal worm drive clamps