


DT SERIES

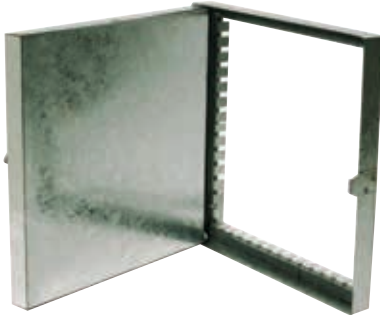

DUCT ACCESS DOORS

Doors are designed to provide access to equipment installed within ducts. The door panels are insulated and gaskets between the panel and frame will assure tight seals without obstruction in the air system.

Door and Frame are fabricated from 24 gage, galvanized steel.

Door is 1" thick, double wall construction and insulated.

Frame is provided with knock-over tabs and easily attached to the duct.

Hinge is continuous piano type.

Cam Latch is self-tightening and hand operated.

Optional Latches:

- CNH- Cam Latch-No Hinge

DW SERIES



DRYWALL ACCESS DOORS

Doors are ideally suited for new installations or for remodeling, in masonry, tile, wood or other wall and ceiling surfaces. Door features rounded safety corners.

Door and Frame are fabricated from 16 gage, galvanized steel with a prime coat finish.

Frame is one piece construction, 1" wide and provides perfect concealment of the rough wall opening. Wall frame is provided with 1/4" mounting holes for fastening within the furred spaces allowing faster installation and fitting maximum clearance.

Concealed Pivoting Rod Hinge prevents distortion and closes door squarely. Doors 24" or larger are provided with a continuous piano hinge.

Latch is screwdriver operated.

Finish is a prime coat suitable for painting.

Optional Latches:

- CL- Cylinder Lock
- AKL- Allen Key Latch
- TH- T Handle

Optional Finish:

- SS- Stainless Steel

DWB SERIES



DRYWALL BEAD ACCESS DOORS

Doors are designed for flush installation in dry wall surfaces. Door features a concealed hinge that prevents distortion and closes door squarely.

Door and Frame are fabricated from 16 gage, galvanized steel with a prime coat finish.

Frame has 1/4" mounting holes positioned to allow anchoring directly to studs to assure a secure mounting. A drywall bead on the frame allows the drywall joint compound to be applied over the bead at the same time as the joints and corners.

Flange has prepunched holes to provide grip for the joint compound and facilitate fastening the flange to framing members with drywall screws.

Concealed Pivoting Rod Hinge prevents distortion and closes door squarely. Doors 24" or larger are provided with a continuous piano hinge.

Latch is screwdriver operated. Finish is a prime coat suitable for painting.

Optional Latches:

- CL- Cylinder Lock
- AKL- Allen Key Latch
- TH- T Handle

Optional Finish:

- SS- Stainless Steel