


NOMINAL SIZE 1"	ACTUAL SIZE		MEDIA SQ. FT. XM	NOMINAL SIZE 2"	ACTUAL SIZE		MEDIA SQ. FT. XM
	W	H			W	H	
10 x 10	9.625	9.625	0.69	10 x 10	9.625	9.625	0.69
10 x 20	9.625	19.625	1.38	10 x 20	9.625	19.625	1.38
10 x 24	9.625	23.625	1.66	12 x 24	11.625	23.625	2.00
10 x 25	9.625	24.625	1.75	14 x 20	13.625	19.625	1.94
10 x 30	9.625	29.625	2.08	14 x 25	13.625	24.625	2.43
12 x 20	11.625	19.625	1.66	15 x 20	14.625	19.625	2.08
12 x 24	11.625	23.625	2.00	16 x 16	15.625	15.625	1.78
12 x 25	11.625	24.625	2.08	16 x 20	15.625	19.625	2.22
12 x 30	11.625	29.625	2.50	16 x 24	15.625	23.625	2.67
12 x 30-5/8	11.625	30.25	2.55	16 x 25	15.625	24.625	2.77
14 x 20	13.625	19.625	1.94	18 x 24	17.625	23.625	3.00
14 x 25	13.625	24.625	2.43	20 x 20	19.625	19.625	2.77
14 x 30	13.625	29.625	2.91	20 x 24	19.625	23.625	3.33
15 x 20	14.625	19.625	2.08	20 x 25	19.625	24.625	3.47
15 x 30	14.625	29.625	3.19	24 x 24	23.625	23.625	4.00
16 x 16	15.625	15.625	1.77	25 x 25	24.625	24.625	4.34
16 x 20	15.625	19.625	2.22				
16 x 22-1/4	15.625	21.875	2.77				
16 x 25	15.625	24.625	2.47				
18 x 25	17.625	24.625	3.13				
19 x 27	18.625	26.625	3.56				
20 x 20	19.625	19.625	2.77				
20 x 25	19.625	24.625	3.47				
22 x 22	21.625	21.625	3.36				
24 x 24	23.625	23.625	4.00				
25 x 25	24.625	24.625	4.34				
8 x 30	7.625	29.625	1.66				
12 x 12	11.625	11.625	1.00				
12 x 16	11.625	15.625	1.33				
12 x 18	11.625	17.625	1.50				
12 x 36	11.625	35.625	3.00				
14 x 14	13.625	13.625	1.36				
14 x 18	13.625	17.625	1.75				
14 x 24	13.625	23.625	2.33				
15 x 25	14.625	24.625	2.60				
15 x 30	14.625	29.625	3.12				
16 x 18	15.625	17.625	2.00				
16 x 24	15.625	23.625	2.67				
16 x 30	15.625	29.625	3.33				
18 x 18	17.625	17.625	2.25				
18 x 20	17.625	19.625	2.50				
18 x 24	17.625	23.625	3.00				
18 x 30	17.625	29.625	3.75				
18 x 36	17.625	35.625	4.50				
20 x 22-1/4	19.625	21.875	3.09				
20 x 24	19.625	23.625	3.33				
20 x 30	19.625	29.625	4.17				
20 x 36	19.625	35.625	5.00				
21 x 21	20.625	20.625	3.06				
24 x 30	23.625	29.625	5.00				
24 x 36	24.625	35.625	6.00				

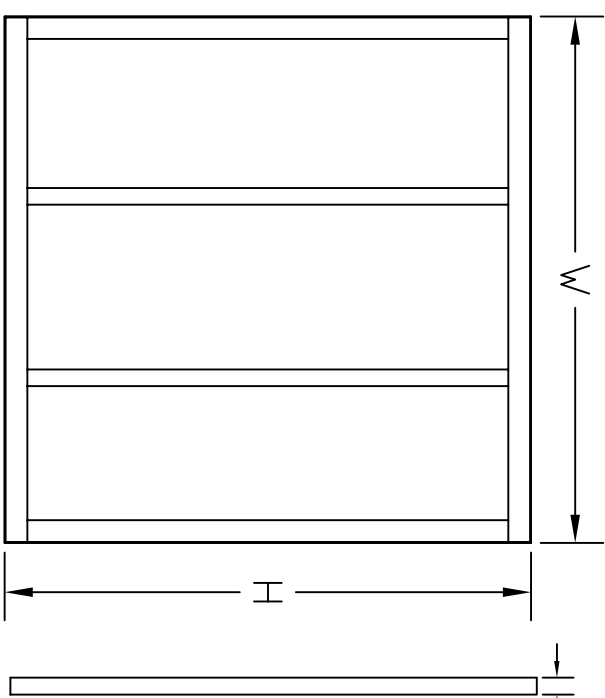

NOTES:

1. FILTER CONSTRUCTION
 - 1.1. PROGRESSIVELY DENSE FIBERGLASS MEDIA
 - 1.2. DUAL REINFORCEMENT STRUTS
 - 1.3. HEAVY DUTY CRAFT BOARD FRAME.
 - 1.4. INTERNALLY THERMAL BONDED
2. FILTERS LISTED AS CLASSIFIED BY U.L.
 3. TOLERANCES +/- 1/8" H&W, +/- 1/16"D
 4. FILTER THICKNESS:
 - 4.1. 1" NOMINAL = .75" ACTUAL
 - 4.2. 2" NOMINAL = 1.75" ACTUAL

PERFORMANCE NOTES:

1. RECOMMENDED FINAL RESISTANCE IS 0.50 in. wg.
2. MAX. TEMPERATURE OF 180 F
3. INITIAL RESISTANCE
 - 3.1. 1" = .09" AT 300 FPM
 - 3.2. 2" = 0.28" AT 500 FPM

REVISION	DESCRIPTION	DATE	DRAWN	NUM
B	COMBINE 1 AND 2	04/28/16	T.M.	
A	FIRST ISSUE NEW LAYOUT	07/15/13	T.M.	

Glassfloss Industries, Inc.
 Excellence in Air Filtration Since 1936

DRAWN BY: T McGrath	DATE: 07/15/13	SCALE: NA	REVISION: B	APPROVED BY:
TITLE: GDS 1" and 2"				