

CURB CONSTRUCTION:

20GA G-90 GALVANIZED STEEL. FULLY WELDED SEAMS AND CORNERS. CURBS SHIP WITH CLOSED CELL NEOPRENE GASKET MATERIAL TO CREATE AN AIR TIGHT SEAL BETWEEN THE CURB AND UNIT.

A= CURB HEIGHT (STANDARD CURB HEIGHT 8", 12" OR 14") SPECIAL CURB HEIGHT AVAILABLE UPON REQUEST.

B= 2"x4" WOOD NAILER.



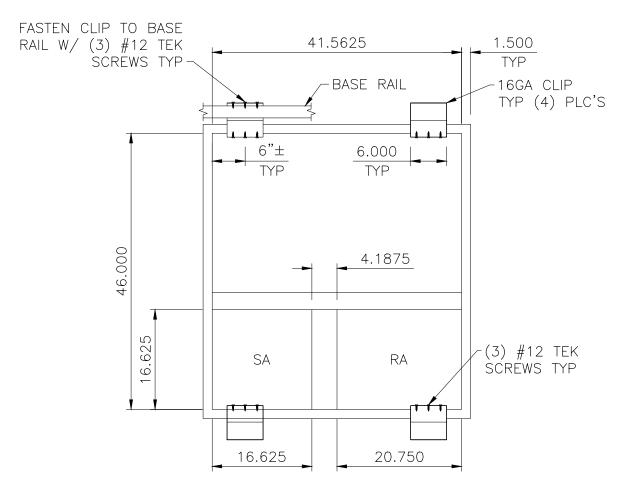

PRODUCT #: CAL21842C

UNI-PRODUCTS, INC.

3315 Elkhorn Blvd North Highlands, CA 95660 (916)-348-3800 www.adaptacurb.com

Mark@adaptacurb.com

DATE: 12/8/2015

DESIGN CRITERIA

WIND: 155 MPH, EXP C, ROOF HEIGHT<60ft Iw=1.0

SEISMIC: Ss=3.73 IP=1.5

CODE: 2013 CBC

Weight: 8" - 44 lbs, 12" 51 lbs, 14" 55 lbs

