



EZ13™

UNIVERSAL ECM REPLACEMENT
FOR FURNACES AND AIR HANDLERS



Truck Stock



Universal Replacement



Ready to Install



Replaces Thousands
of OEM Models

Improved
Reliability With:



Built-in 6,000 Volt
surge protection



Industry-leading
moisture protection



No
Programming
Required

TC
MOTORS
UP

SPECIFICATIONS

HORSEPOWER: 1/3-1/2, 3/4 AND 1 HP

VOLTAGE: 1Ø, 115, 208-230 Vac

SPEEDS: 1075/Var

ROTATION: Auto-Rotation Sensing

INPUTS: 24Vac, Tap Inputs

HERTZ: 50/60 Hz


OPERATION MODE: Constant Torque

FRAME: NEMA^{®†} 48

ENCLOSURE: Open Air Over (OAO)

EFFICIENCY: Up to 82%

MOUNTING: Belly-band

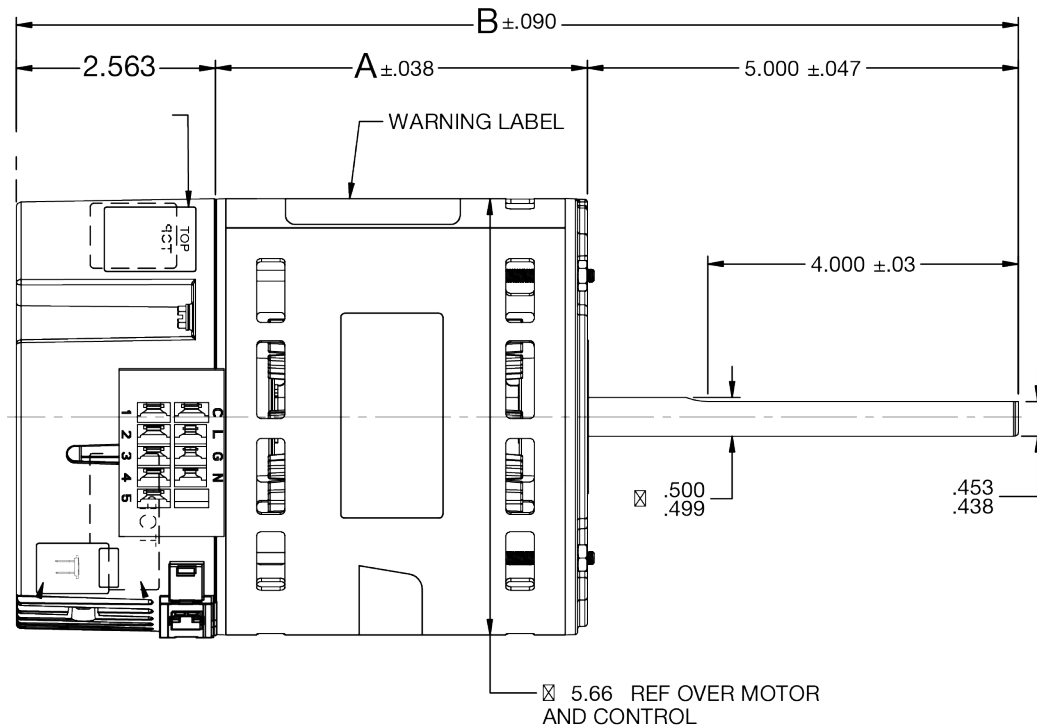

| CATALOG NUMBER | HP | VOLTS | AMPS | RPM | DIM. A | DIM. B |
|----------------|----------|-------------|--------------|----------|--------|--------|
| 5632 | 1/2 -1/3 | 115/208-230 | 6.3/4.0-3.8 | 1075/Var | 3.662 | 11.225 |
| 5642 | 3/4 | 115/208-230 | 9.3/5.8-5.4 | 1075/Var | 4.037 | 11.600 |
| 5652 | 1 | 115/208-230 | 12.4/7.8-7.2 | 1075/Var | 4.412 | 11.975 |



NIDEC MOTOR CORPORATION

8050 W. Florissant Avenue | St. Louis, MO 63136

Phone: 855-487-6686 | Fax: 800-899-2887

† All marks shown within this document are properties of their respective owners.

Nidec Motor Corporation, 2019; All Rights Reserved. U.S. MOTORS[®] is a registered trademark of Nidec Motor Corporation. Nidec Motor Corporation trademarks followed by the © symbol are registered with the U.S. Patent and Trademark Office.

19-8507-01 RESCUE EZ13 PDS

