


CURB CONSTRUCTION:

20 GA G-90 GALVANIZED STEEL. FULLY WELDED SEAMS AND CORNERS. CURBS SHIP WITH CLOSED CELL NEOPRENE GASKET MATERIAL TO CREATE AN AIR TIGHT SEAL BETWEEN THE CURB AND UNIT.


MODEL	A	B	C
ADJ8	8" TO 14"	14" MAX	8"
ADJ12	12" TO 18"	18" MAX	12"

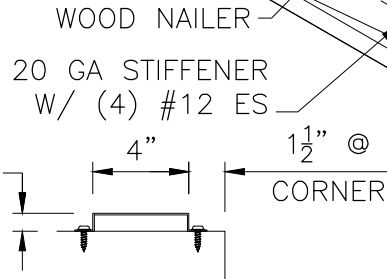

FASTEN CLIP TO BASE RAIL W/ (3) #12 TEK SCREWS TYP

BASE RAIL

16GA CLIP TYP (4) PLC'S

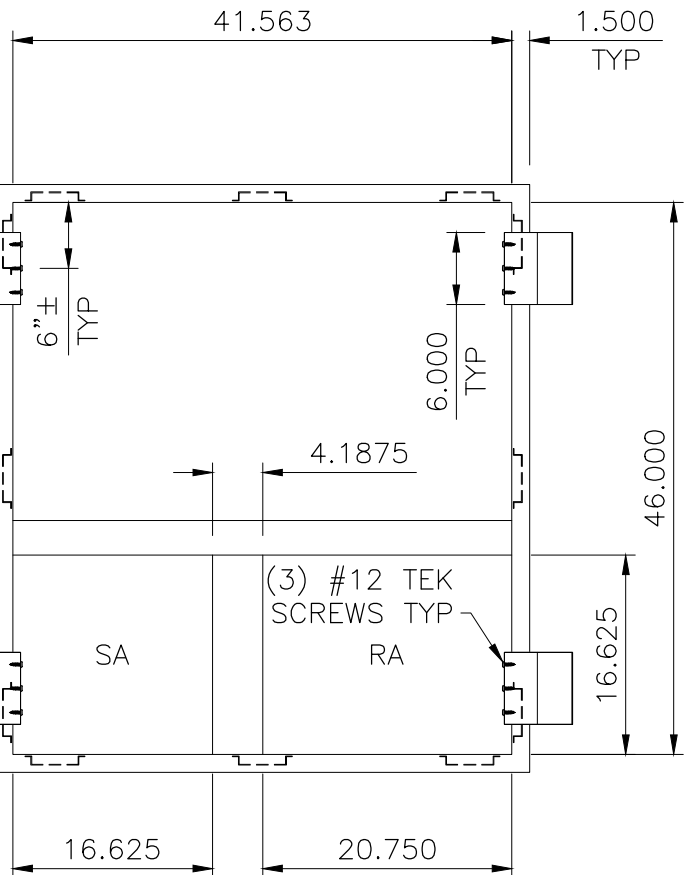

MAXIMUM PITCH RANGE		
ADJ8	PITCH SHORT	PITCH LONG
SET AT 8"	1 ON 12	1 ON 12
SET AT 12"	0.577 ON 12	0.521 ON 12
ADJ12	PITCH SHORT	PITCH LONG
SET AT 12"	1 ON 12	1 ON 12
SET AT 14"	1 ON 12	1 ON 12

**PRODUCT #: ADJ8-21836DA
ADJ12-21836DA**

PATENT #8,960,620

UNI-PRODUCTS, INC.

3315 Elkhorn Blvd
North Highlands, CA 95660
(916)-348-3800
www.adaptacurb.com
Mark@adaptacurb.com

DATE: 12/8/2015
DESIGN CRITERIA
WIND: 155 MPH, EXP C, ROOF HEIGHT<60ft lw=1.0
SEISMIC: Ss=3.73 IP=1.5
CODE: 2013 CBC
Weight: 8" 98 lbs, 12" 110.50"

